


SBT Series Technical Details

SBT Series	Cutting Length	Cutting Capacity		Throat Depth	Stroke per min.	Cutting Angle	Holddowns	Holddown Force	Back Gauge Range	Back Gauge Force
		MS (450 N/mm²)	SS (700 N/mm²)							
		mm	mm							
	A			D						
3006	3100	6	4	50	15	1° 30'	16	14	1000	0,75
3010	3100	10	6	50	13	1° 30'	16	22	1000	0,75
3013	3100	13	8	50	13	1° 45'	16	37	1000	0,75
3016	3100	16	10	350	10	2°	14	61	1000	0,75
4006	4100	6	4	50	12	1° 30'	20	17	1000	0,75
4013	4100	13	8	350	8	1° 45'	18	62	1000	0,75

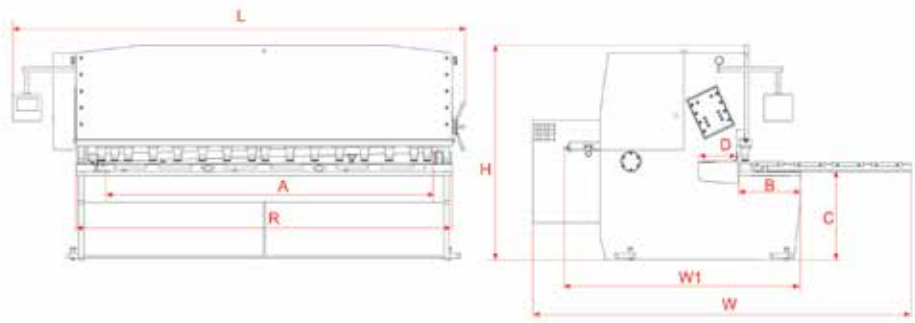

Back Gauge Speed	Motor Power	Oil Capacity	Front Armas	Tabla Height	Table Width	Table Length	Length	Width	Total Width	Height	Weight
mm/sn.	kW	lt	Unit	mm	mm	mm	mm	mm	mm	mm	~kg
				C	B	R	L	W1	W	H	
200	15	200	2	865	500	3515	4110	2200	3700	2100	7300
200	22	200	2	865	580	3515	4200	2250	3600	2100	9050
200	30	330	2	845	600	3550	4280	2300	3600	2350	11800
200	37	410	2	818	550	3580	4550	2250	3825	2250	14580
200	15	200	3	865	580	4510	5230	2300	3600	2150	11460
200	30	330	3	818	550	4520	5350	2250	3650	2250	16300

Standard & Optional Equipment

Standard Equipment

Heavy duty St 44 steel construction & stress relieved frame
User friendly CNC Touch screen control unit D-Touch 7
Throat Depth 350 mm (SBT 3016 & 4016 available)
Easy blade gap adustment
Ball integrated front tables
Ballscrew back gauge, 1000 mm & automatic swing-up
Squaring arm with scale & T-Slot & tilting stop
Support arms T-Slot & Tilting stop
Illumination & shadow line1 mt flip-up finger guards
Automatically pressure adjusted solid holddowns
Top blades with 2 sides and Bottom blades with 4 sides
Motorised Foldable Backgauge (3006&3010&3013&4006)
Manuel Foldable Backgauge (SBT 3016&4016 available)
Foot pedal
High performance hydraulics & electronics components
Automatic Swing-up back gauge
CE-Norm

Optional Equipment

Motorized blade gap adjustment
Laser cutting line
Light curtains for finger protection
Pneumatic thin sheet support DURMA I
Pneumatic thin sheet support DURMA IV
Special throat depth
Backgauge 1250 mm.
Add. support arms
Special blades
Oil coolant
Oil Heater
Adjustable angle stop 0-180°
Control panel on opposite position
Temperature measurement
Overseas special packaging